


## → INSTALLATION MANUAL







Insert the leveller screws all the way into the threaded holes in the foot stand plates. Note: Ensure that the display rack is level when assembly of the framework is complete.




Put the pillars in place; use one hand to insert the hooks on the back of the lower anchor into the holes near the bottom of the pillar and oush down to lock.



To prevent the anchor from becoming loose, ensure that the two angled attachment tabs above the hooks firmly hold the pillar in place. Note: Use a hammer to tap the anchor into place for firm assembly.




Insert the hooks at one end of the foot stand plate tightly into the holes on the side of the pillar and push down to lock into place.




8

A central anchor is needed when the pillars are too tall. After installing the foot stand plates, insert the central anchor into the mountings in the middle of the pillars and push down to lock into place.




To install the slat wall's central back pillar, insert the bottom of the pillar into the slot in the foot stand plates.




To install the back panel (either slat wall or pegboard) push the two sides of the pre-installed back panel into the grooves in the pillars in an upwards direction and then push down to lock into place.




After installing the back panel, insert the hooks on one end of the upper anchor into the slots at the top of a pillar; repeat with the other pillar and use a hammer to tap the hooks firmly into place.




To install the base front, put the holes on one end of the base front over the hooks on one foot stand plate and push down to lock into place; install the other end the same way.




Make sure that the hooks on the top of the base front are firmly inserted into the holes on top of the foot stand plates when installing the other end of the base front.



The display rack framework is now complete.





To install the base shelf, hold the front of the base shelf with both hands, lift the shelf up at a 45° angle and insert the plate at the back of the base shelf into the groove in the lower anchor until it clicks into place. Place the back panel in a horizontal position and make sure the tenons at the back of the shelf are securely featered into the School halos in the page fastened into the S-shaped holes in the anchor.




To install the pillar side covers, insert the hooks inside the side covers into the holes in the pillars and push down to lock into place.







To install the base side plates, place them on the foot stand plates, and insert the hooks at the front of the side plates into the holes used to attach the base front. Insert the lips on the pillar side covers into the grooves in the anchors and push down to lock into place.






Put the shelf brackets in place. Insert the shelf brackets into the desired holes and push down to lock the hooks into place.



Put the shelves in place. Hold up the front edge of the shelves in place. Hold up the Holt edge of the shelves roughly at a 45° angle and position the side plates on both sides of the shelves over the outsides of the brackets; lower the shelves into position and make sure the tenons are in place.



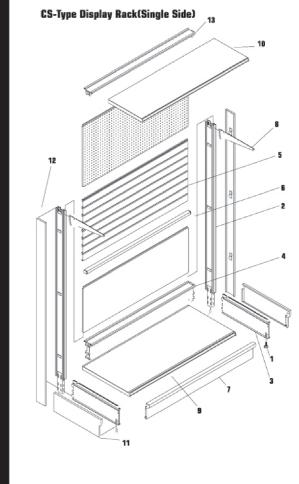

- 1 Leveller
- 2 Pillar 3 Foot Stand Plate
- 4 Lower Anchor
- 5 Slat Wall
- 6 Central Anchor
- 7 Base Front
- 8 Bracket 9 Base Shelf
- 10 Shelf
- 11 Base Side Plate
- 12 Pillar's Side Cover
- 13 Top Anchor